


CHECKLIST



- A** 2 x Sidebars
- B** 1 x Locking bar
- C** 2 x Pipe Insert
- D** 1 length double spliced rope
2 x 4mm R clips & 2 x 5mm R clips
2 x Shaft locking pins

ASSEMBLY INSTRUCTIONS

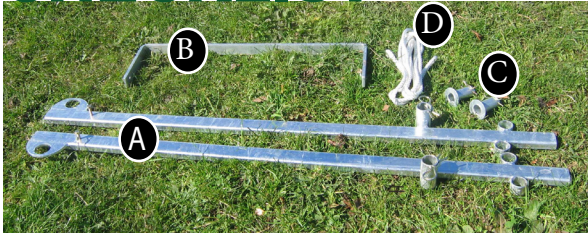

1. ATTACH SIDEBARS

- Place sidebar **A** on the inside of Wrangler's middle backleg-bar profile
- Insert and secure with 5mm R clip
- Attach other sidebar in same manner



2. INSERT LOCKING BAR **B**

- Insert locking bar into end of sidebars
- Secure each side with shaft locking pin
- NB: If holes don't line up well trying flipping locking bar



3. INSERT WRANGLER BACKLEG BAR

- Insert Wrangler backleg bar into sidebars and secure with R clip



4. ATTACH ROPE

- Attach rope to top hook and pass around backleg bar.
- The other end is to be attached to the calf



5. ROTATE CALVING ATTACHMENT

- Rotate calving attachment up ready for cow to walk into Wrangler